


①


Begin by holding as shown.
press top down.

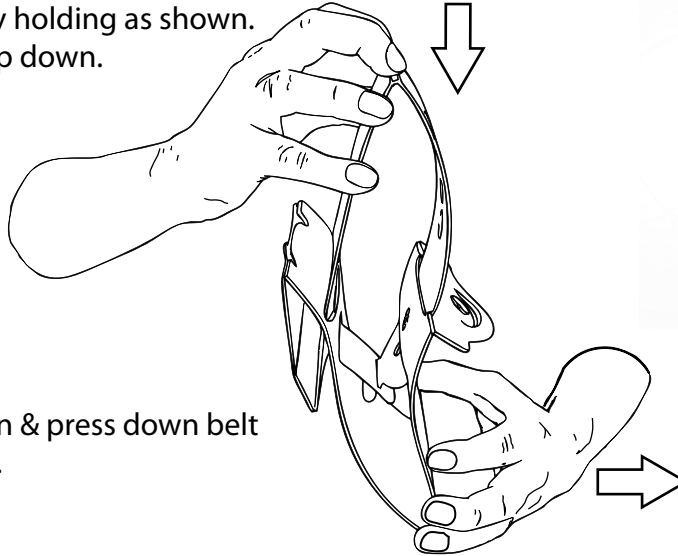


Pull open & press down belt
into slot.

②

Pull apart & continue to press down

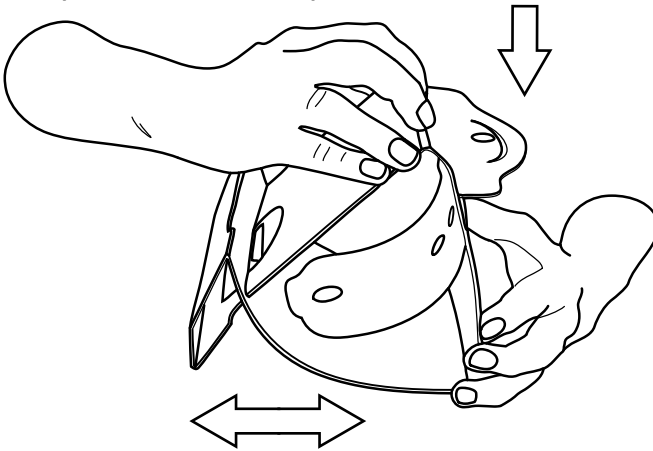

③

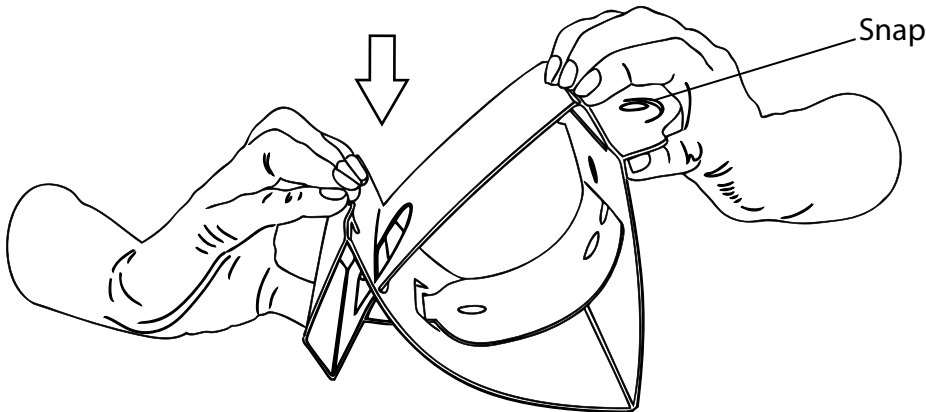

Clamp down front to adjust to correct shape.
Adjust to desired angle and snap lock through setting hole.

To Close: Unsnap lock,
Pull top out and crush flat and snap.